

# FHT



FHT Battery Range

**FIAMM**  
+            -

+  
FIAMM.COM

**F** IAMM FHT RANGE HAS BEEN DESIGN TO WITHSTAND HARSH ENVIRONMENTAL CONDITIONS. SPECIAL GRID ALLOY AND SUPERIOR GRIDS DESIGN GRANT 7 YEARS DESIGN LIFE AT 95°F.

FHT RANGE HAS FRONT TERMINAL DESIGN IDEAL FOR INSTALLATION ON CABINET 19" AND 23"; IT ALLOWS EASY ACCESS FOR MAINTENANCE REDUCING THE INSTALLATION FOOTPRINT AND MAXIMISING THE ENERGY DENSITY. FHT USES PROVEN VRLA TECHNOLOGY WITH 99% INTERNAL RECOMBINATION EFFICIENCY, IS NON-SPILLABLE AND MAINTENANCE FREE THEREFORE REQUIRES NO TOPPING UP OF ELECTROLYTE DURING ITS FLOAT-LIFE. FHT RANGE IS COMPLIANT WITH THE HIGHEST RECOGNISED INTERNATIONAL STANDARD, IT IS NON-HAZARDOUS FOR AIR/SEA/RAIL/ROAD TRANSPORTATION AND IT IS 100% RECYCLABLE. FHT HAS A SELF-DISCHARGE RATE LESS THAN 2% PER MONTH, GUARANTEEING LONG SHELF-LIFE.



#### MAIN APPLICATIONS:



## SPECIFICATIONS

Superior alloy grid, designed to resist corrosion and provide short recharge time

VRLA AGM technology using advanced low resistance microfiber-glass separator for unsurpassed cyclic characteristics


Leak resistant post seal, threaded female M8 terminals with high conductivity and maximum torque resistance

One-way safety relief valves allow gas to escape and prevent the ingress of oxygen and flame arrestors prevent sparks or flames entering the battery

Flame retardant ABS/PC plastic to IEC 707 and UL94 FV0 (LOI greater than 28%) to guarantee superior thermal stability

Installation in any orientation (excluding permanently inverted)

## TECHNOLOGY

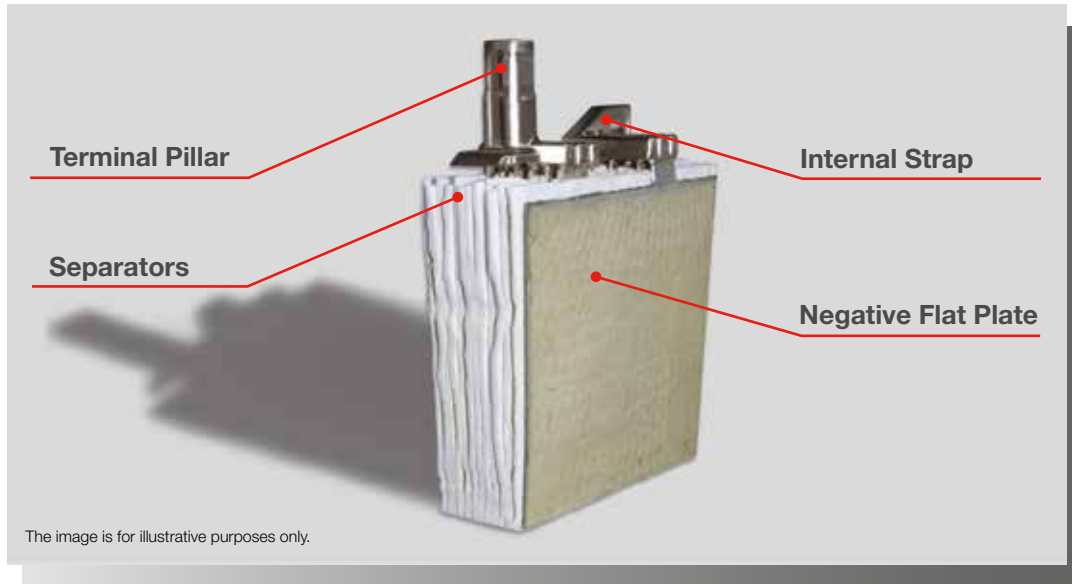

FIAMM FHT RANGE USE AGM (ABSORBED GLASS MAT) TECHNOLOGY. THE ELECTROLYTE IS ABSORBED IN FIBERGLASS SEPARATORS WITH 99% INTERNAL GAS RECOMBINATION EFFICIENCY. BLOCS ARE GRANTS NON-SPILLABLE AND MAINTENANCE FREE THEREFORE REQUIRES NO TOPPING UP OF ELECTROLYTE DURING ITS WHOLE LIFE. LOW SELF-DISCHARGE ALLOWS 6 MONTHS SHELF LIFE.

BATTERY TYPE	NOMINAL VOLTAGE (V)	CAPACITY (Ah) 8 H to 1.75 VPC at 77°F	SHORT CIRCUIT CURRENT (A) IEC 60896 21-22	INTERNAL RESISTANCE (mOhm) IEC 60896 21-22	NOMINAL DIMENSIONS (in.)			TYPICAL WEIGHT (lbs)
					Length	Width	Height	
12FHT101	12	95	2745	4.7	4.25	15.55	10.83	75
12FHT151	12	150	2595	4.9	4.33	20.91	12.36	110
12FHT181	12	180	3057	4.1	4.96	21.97	12.64	130

## ELECTRICAL CHARACTERISTICS

Float Voltage: 2.23 V/cell at 95°F  
 Boost Voltage: 2.35 V/cell  
 Float Voltage Compensation with Temperature: -1.39 mV/cell/°F  
 Self-Discharge at 68°F: <2%/month

## STANDARDS

IEC 60896 Part 21 - VRLA methods of testing  
 IEC 60896 Part 22 - VRLA requirements  
 BS 6290 Part 4 - specifications for VRLA classification  
 BS633 / UL 94 V0 / IEC 707 FV0  
 Eurobat ">12 years VERY LONG LIFE"


## CERTIFICATIONS

ISO 9001  
Quality Management System  
ISO 14001  
Environmental Management System  
ISO 45001  
Workplace Safety & Health

## ACCESSORIES

RVS (remote venting system) for applications which require remote gassing  
Rack for battery installation (standard and anti-seismic)  
Cabinets for battery installation (including electrical protections and disconnection)  
Battery monitoring systems


### DISCHARGE CURVES at different current / final voltage (at 68°F)

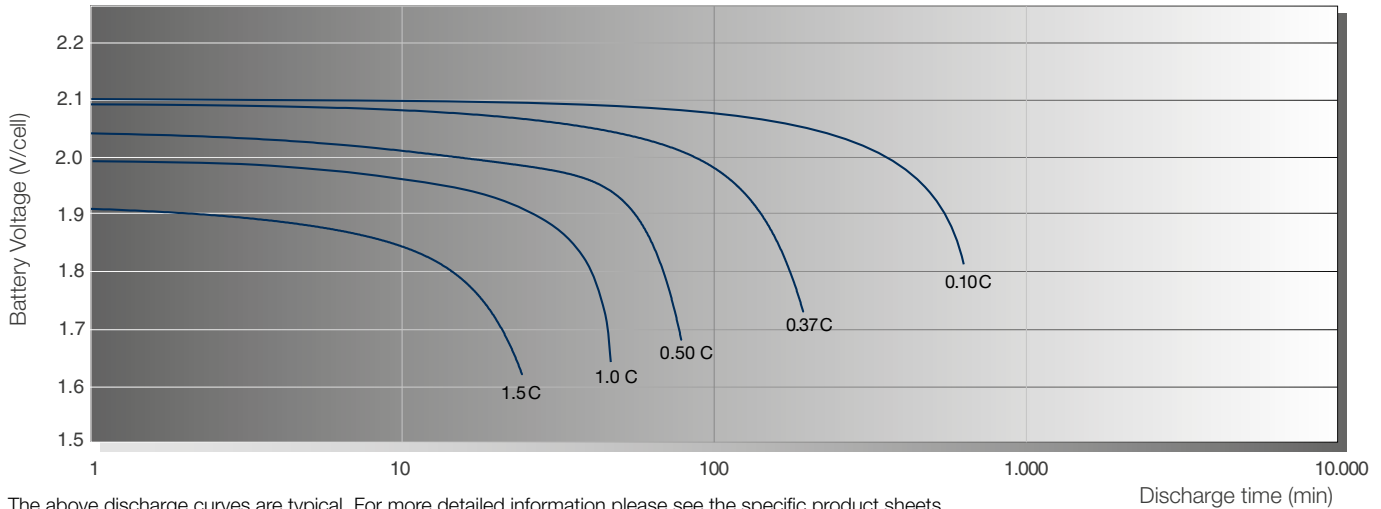

The above discharge curves are typical. For more detailed information please see the specific product sheets.


### TYPICAL CHARGE CURVES

Battery Voltage and Charge Time for Standby Use (at 68°F)

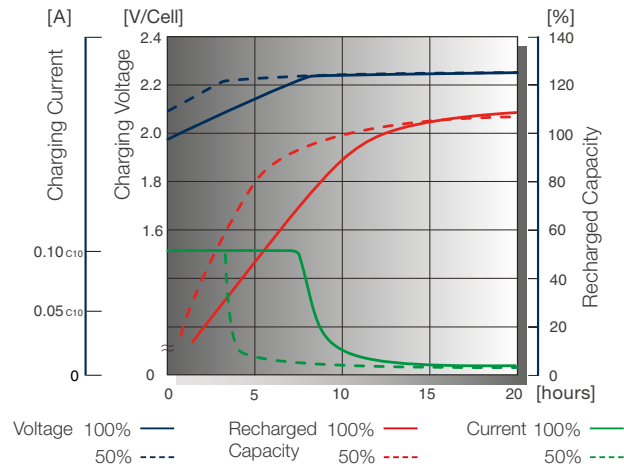

### STORAGE

Capacity loss during storage at various temperatures

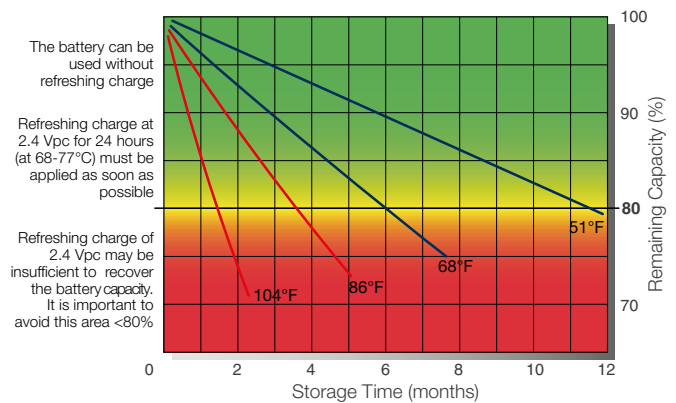

### FIAMM Energy Technology (USA) LLC

770 Mills Rd  
PO Box 627  
30830 - Waynesboro GA (U.S.A.)  
Tel. +1 (706) 437-3220  
Fax +1 (706) 437-3300

info.industrial.northamerica@fiamm.com  
www.fiamm.com

fiamm.batteries  
 fiambatteries  
 youtube.com/user/FIAMMvideo